CLASS 150 & 300 SD, DD, LD, LB SERIES

PACKING OPTIONS

FIGURE NUMBER ITEM VII

"T" OPTION
TEMPERATURE <= 400 F

"N" OPTION
TEMPERATURE > 400 F

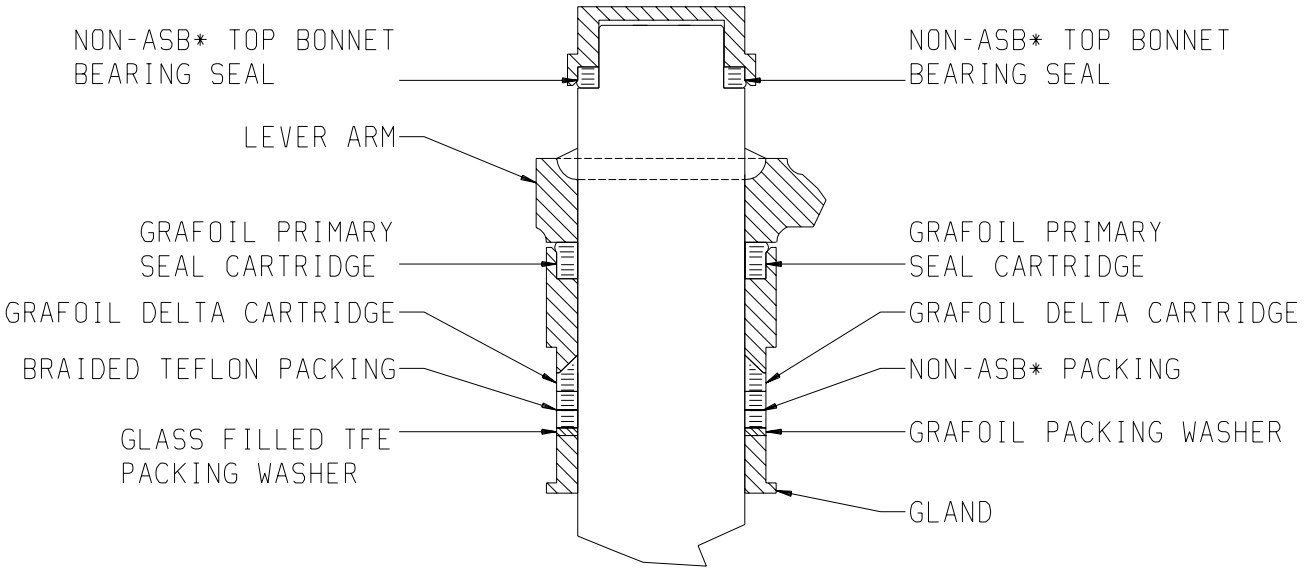

TYPICAL ***NON-ASB**** TOP BONNET BEARING RING OR PACKING RING	TYPICAL ***BRAIDED TEFLON*** PACKING RING	TYPICAL ***GRAFOIL*** PRIMARY SEAL CARTRIDGE	TYPICAL ***GRAFOIL*** DELTA CARTRIDGE
			

TYPICAL ***GLASS FILLED TFE OR GRAFOIL*** PACKING WASHER ****



* This is a high temperature flexible non-asbestos braided packing with an inner inconel wire.

** The packing washer acts as a thrust bearing whose function is to protect the packing from wear caused by the indexing motion of the valve gland during valve cycling.

EVERLASTING VALVE COMPANY
108 SOMOGYI CT. S. PLAINFIELD N.J. 07080
TEL: 908-769-0700 FAX: 908-769-8697