CLASS 150 & 300 SD, DD, LD, LB SERIES

STANDARD ACCESSORIES

LIMIT SWITCHES

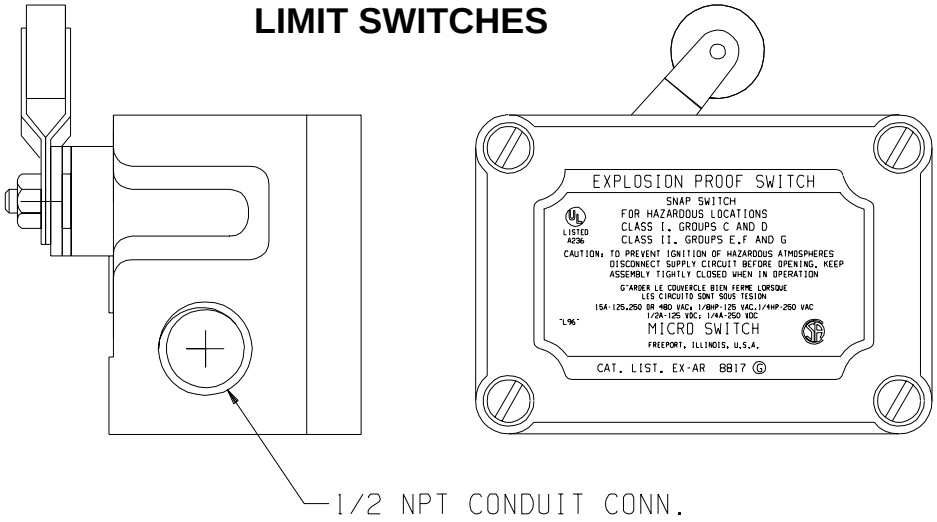

TYPE: S.P.D.T. N.O. OR N.C.

ELECTRICAL RATING: 15 amps, 125, 250 or 480 vac; 1/2 amp 125 vdc; 1/4 amp 250 vdc.

NEMA RATING: CLASS I, GROUPS C AND D; CLASS II, GROUPS E, F AND G

TEMP. RATING: 160F MAX

MANUF: MICRO SWITCH EXAR

PROXIMITY SWITCHES

INTEGRALLY MOUNTED
IN
AIR CYLINDER ACTUATOR

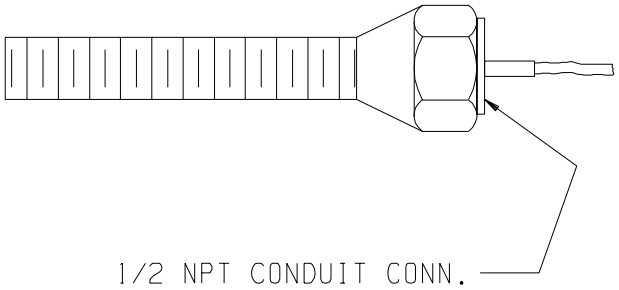

TYPE: S.P.D.T. N.O. OR N.C.

ELECTRICAL RATING:
2A @ 240 VAC;
50 mA @ 24 VDC

APPROV. RATING: CLASS I, GROUPS A, B, C AND D; CLASS II, GROUPS E, F AND G CLASS III.

TEMP. RATING: -40 F to 221 F

MANUF: GENERAL EQUIPTMENT GO SWITCH

SOLENOID VALVES

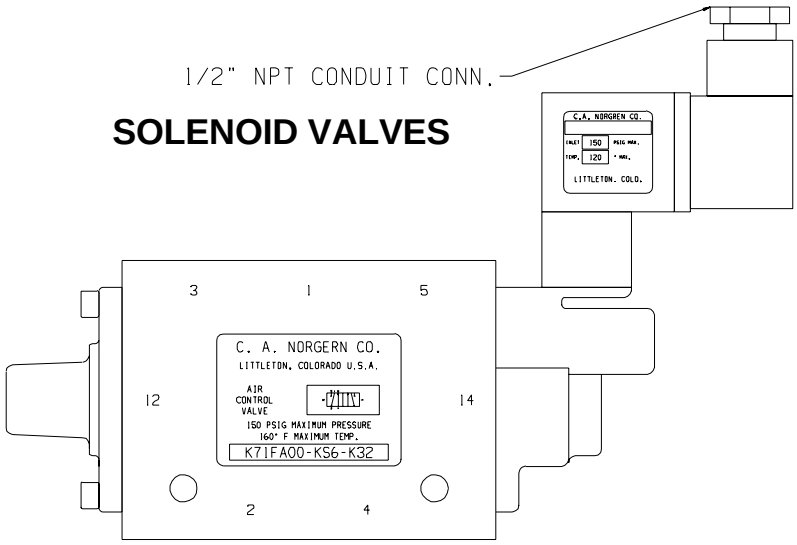

TYPE: SINGLE COIL 4-WAY SPRING RETURN

ELECTRICAL RATING: 110 volts, 8va

NEMA RATING: NEMA 4

TEMP. RATING: 120F MAX

AIR CONN'S: 1/2" NPT

AIR PORT: 1/4"

MANUF: NORGREN NUGGET 200

NOTE: The switches and solenoid valves illustrated above are our standard offering. Other switches and solenoid valves are available at additional cost.

EVERLASTING VALVE COMPANY, INC
108 SOMOGYI CT., S. PLAINFIELD N.J. 07080
TEL: 908-769-0700 FAX: 908-769-8697
Member VMA